

A **TATA** Product

VOLTAS

TRUSTED BY INDIA, CRAFTED FOR YOUR SUCCESS

Commercial Refrigeration Range



2026

ABOUT **TATA**

A Legacy of Integrity, Innovation & National Pride

Founded in 1868 by Jamsetji Tata, The Tata Group has grown into one of India's most respected and globally recognized conglomerates. With a diverse portfolio spanning steel, automobiles, IT, hospitality, and more, Tata is not just a business—it's a philosophy rooted in service to society. Driven by ethical values and a commitment to sustainable development, Tata has played a transformative role in shaping India's industrial and socio-economic landscape. Its enduring success is built on trust, reliability, and a deep sense of responsibility toward the nation. Today, Tata stands as a symbol of Indian resilience and ingenuity, contributing to both economic progress and societal well-being. More than a brand, Tata represents a vision for a better, more inclusive India—and a future where business and purpose go hand in hand.

JAMSETJI TATA



VOLTAS

INDIA'S 1ST THAT KEEPS INDIA FIRST

#1

Strongest Indian Brand

Ranked #1 among Indian brands for strength and reliability — a testament to Voltas' enduring legacy.




Voltas has been India's most trusted brand when it comes to comfort cooling, precise refrigeration, & Innovation



1750+

Authorised Service Centres

A robust service network stands behind its every product sold ensuring peace of mind for all customers



Most Valuable Engineering Brand

Secured the #4 spot among the Most Valuable Indian Engineering Brands, showcasing leadership in innovation and technical excellence.

HARDTOP CHEST FREEZERS / CONVERTIBLE

These Energy efficient large capacity Chest Freezer & dual temperature Technology Convertible Models uses Eco Friendly Refrigerant for cooling / freezing & are ideal for storing Frozen Food, Beverages & Dairy Products.



Soft Aesthetic Design



Rollers For Easy Mobility



Star Rating



UV Grade Plastic For Long-lasting Appearance



Door Lock For Restricted Accessibility



Anti-corrosive Pre-coated Body



Eco-friendly Refrigerant



Dual Temperature Freezing/Cooling



Safety Compliant



Compact Design



Sunken Handle For Safer Operation



Spring Loaded Hinges For Effortless Usage



Tropicalized Machines

TECHNICAL SPECIFICATIONS

Description	CVF136SB2-A-G2	CVF250SA3-P	CVF320DB3-P	CVF500DA4-P3	CVF321DA5-W1	CVF406DA5-W	CVF501DA5-W1	CF600TA4-P
Product Dimension (WxDxH)	515 x 550 x 845	838 x 665 x 795	1184 x 665 x 795	1684 x 665 x 830	1094 x 692 x 876	1224 x 692 x 910	1494 x 692 x 910	1912 x 665 x 860
Temperature Range	<-18°C (Freezer), 0° to 7°C (Cooler)	<-18°C (Freezer), 0° to 7°C (Cooler)	<-18°C (Freezer), 0° to 7°C (Cooler)	<-18°C (Freezer), 0° to 7°C (Cooler)	<-18°C (Freezer), 0° to 7°C (Cooler)	<-18°C (Freezer), 0° to 7°C (Cooler)	<-18°C (Freezer), 0° to 7°C (Cooler)	<-18°C (Freezer)
Storage Volume (In Ltrs)	97	190	295	445	303	346	443	508
BEE Star Rating	2 Star	3 Star	3 Star	3 Star	4 Star	4 Star	4 Star	3 Star
Refrigerant	R-600a	R-600a	R290	R290	R290	R290	R290	R290
No. Of Doors	1	1	2	2	2	2	2	3
No. Of Baskets	1	1	1	1	1	1	1	1
Door Lock	Available	Available	Available	Available	Available	Available	Available	Available
Wheel Type	Foot	Roller	Roller	Castor	Roller	Castor	Castor	Castor-4Nos
Power Plug	6A	6A	6A	6A	6A	6A	6A	6A



FLAT GLASS TOP FREEZERS

Frozen foods and ice-creams find a robust and reliable home in the New Energy Efficient Flat Glass Top Freezers which now comes with option of LED Light Inside for better visibility. Built sturdy for heavy use. Freezers are tropicalised for better cooling at higher temperatures & Low emissivity glass for longer cooling retention.



Soft Aesthetic Design



Wheels For Easy Mobility



Special Baskets



Star Rating



Eco-friendly Refrigerant



UV Grade Plastic For Long-lasting Appearance



Door Lock For Restricted Accessibility



Anti-corrosive Pre-coated Body



Low Emissivity Glass To Avoid Cooling Loss



Longer Cooling Retention



Safety Compliant



Tropicalized Machines



Aluminium Inner Liner



LED Light

TECHNICAL SPECIFICATIONS

Description	GT220GA5-W-FL	GT340GA5-W-FL	GT440GA5-W2-FL	GT520GA5-W2-FL
Product Dimension (WxDxH)	838 x 624 x 855	1184 x 624 x 855	1454 x 624 x 855	1684 x 624 x 855
Temperature Range	<-18°C	<-18°C	<-18°C	<-18°C
Storage Volume (In Ltrs)	176	275	326	385
BEE Star Rating	3 Star	3 Star	3 Star	3 Star
Refrigerant	R290	R290	R290	R290
Illumination Inside (Front Side)	Yes, LED	Yes, LED	Yes, LED	Yes, LED
No. Of Glass Doors (Sliding)	2	2	2	2
Door Lock	Available	Available	Available	Available
Wheel	Castor Wheel	Castor Wheel	Castor Wheel	Castor Wheel



COMBO COOLERS

Enjoy the dual functionality of a cooler and a freezer. The cooler compartment can be used for storing cold beverages and at the same time the freezer, for storing ice-cream and frozen foods. The coolers come with robust construction for heavy duty use. Tropical compressor in Combo Coolers ensure high performance freezing even in higher ambient temperatures of the Indian summer.



Soft Aesthetic Design



Wheels For Easy Mobility



Energy-efficient Compressor



Safety Compliant



Compact Design



UV Grade Plastic For Long-lasting Appearance



Door Lock For Restricted Accessibility



Anti-corrosive Pre-coated Body



Spring Loaded Hinges For Effortless Usage



Upto 40% Electricity Saving



Dual Temperature Freezing/Cooling



Tropicalized Machines



Aluminium Inner Liner



Eco-friendly Refrigerant

TECHNICAL SPECIFICATIONS

Description	CB HT300 DD V	CB HT400 DD V
Product Dimension (WxDxH) in mm	1115 x 720 x 845	1405 x 720 x 845
Temperature Range	<-18°C (Freezer), 0° to 7°C (Cooler)	<-18°C (Freezer), 0° to 7°C (Cooler)
Gross Volume (Cooler, Freezer in Ltrs)	300	400
Refrigerant	R290	R290
No. Of Baskets	1	1
No. Of Doors	2	2
Arrangement for Door Lock	Available	Available



VISI COOLERS



Form meets function in this stylish glass door merchandiser. The Visi Coolers are especially designed to cool products uniformly as well as showcase the products inside, ideal for storing beverages and dairy products for a longer time at desired temperatures. The coolers are tropicalized for cooling in high temperatures and designed for faster pull down time. These compact storage solutions are a perfect match for commercial cooling purposes.



Soft Aesthetic Design



Wheels For Easy Mobility



Energy-efficient Compressor



LED Light



Rugged And Heavy-duty Shelves



UV Grade Plastic For Long-lasting Appearance



Door Lock For Restricted Accessibility



Anti-corrosive Pre-coated Body



Longer Cooling Retention



Compact Design



Safety Compliant



Tropicalized Machines



Low - E Glass To Avoid Cooling Loss



Eco-friendly Refrigerant

TECHNICAL SPECIFICATIONS

Description	VC GT50 SD FGLS	VC GT220 SD FGLS	VC GT320 SD FGLS	VC GT450 SD	VC GT550 DD	VC GT1000 DD
Product Dimension (WxDxH)	450 x 460 x 500	535 x 580 x 1400	560 x 610 x 1700	650 x 640x 1900	770 x 640 x 1960	1155 X 770 X 2022
Temperature Range	4°C to 10°C	2°C to 10°C	2°C to 10°C	2°C to 10°C	2°C to 10°C	2°C to 10°C
Gross Volume (In Ltrs)	48	215	310	426	526	950
Refrigerant	R-600a	R-134a	R-290	R290	R290	R-290
Illumination Inside	No	LED	LED	LED	LED	LED
No. Of Shelves	1	3	4	5	5 + 5	5 + 5
No. Of Doors	1	1	1	1	2	2
Arrangement for Door Lock	No	Yes	Yes	Yes	Yes	Yes
Wheel	NA	Yes	Yes	Yes	Yes	Yes



WATER COOLERS



Quench your thirst for chilled water with Voltas Water Coolers & Enjoy cool, clean water anytime.



Soft Aesthetic Design



In-situ Puf Insulation



Energy-efficient Compressor



Upto 40% Electricity Saving



Food Grade Stainless Steel



Anti-corrosive Pre-coated Body



Longer Cooling Retention



Eco-friendly Refrigerant



Safety Compliant



Tropicalized Machines

TECHNICAL SPECIFICATIONS

Description	15/15 PSS/FSS	15/40 PSS/FSS	30/40 PSS/FSS	40/80 PSS/FSS	60/80 PSS/FSS	60/120 PSS/FSS	150/150 PSS/FSS
Storage Capacity (Ltrs)	15	40	40	80	80	120	150
Cooling Capacity(Ltrs/hr)	15	15	30	40	60	60	150
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a	R-134a	R-32
Thermostat Type (Range)	Electromechanical (8 To 27° C)	Electromechanical (8 To 27° C)	Electromechanical (8 To 27° C)	Electromechanical (8 To 27° C)	Electromechanical (8 To 27° C)	Electromechanical (8 To 27° C)	Electromechanical (8 To 27° C)
Number Of Faucet	1	1	1	2	2	2	2
Storage Tank - SS Food Grade	Yes	Yes	Yes	Yes	Yes	Yes	Yes
IP Rating 2l	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Foot	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic
Product Dimensions With Trough (WxDxH)	368 x 548 x 1033	461 x 621 x 1087	461 x 621 x 1087	461 x 621 x 1311	461 x 621 x 1311	566 x 746 x 1266	566 x 746 x 1391

NCW

Description	15/40 PSS & FSS-NCW	40/80 PSS & FSS-NCW
Storage Capacity (Ltrs)	40	80
Cooling Capacity (Ltrs/hr)	15	40
Refrigerant	R-134a	R-134a
Thermostat Type (Range)	Electromechanical (8 To 27° C)	Electromechanical (8 To 27° C)
Number Of Faucet	2=1+1 (1 NORMAL+1 COLD)	2=1+1 (1 NORMAL+1 COLD)
Storage Tank - SS Food Grade	Yes	Yes
IP Rating 2l	Yes	Yes
Foot	Plastic	Plastic
Product Dimensions With Trough (WxDxH)	461 x 621 x 1087	461 x 621 x 1311



WATER DISPENSERS

Stay Hydrated with the new range of Water Dispensers. Available in Table top, Floor standing storage cabinet, Refrigeration cabinet - smart choice for every office and home.



Safety Lock



Compact Design



Energy-efficient Compressor



Eco-friendly Refrigerant



Tropicalized Machines



LED Indicators



UV Grade Plastic For Long-lasting Appearance

TECHNICAL SPECIFICATIONS

SPRING SERIES

Models	Minimagic Spring T T+	Minimagic Spring RV+	Minimagic Spring FV+	Minimagic Spring FS+	Minimagic Spring RB+
Unit Dimension (in mm) (WxDxH)	310 x 355 x 490	310 x 330 x 970	310 x 330 x 970	310 x 330 x 970	310 x 330 x 970
Refrigerant	R-134	R-134	R-134	R-134	R-134
Type	Table Top	Floor Mounted	Floor Mounted	Floor Mounted	Floor Mounted
Cabinet	No	Cooling Cabinet	Storage Cabinet Only	No	Cooling Cabinet
Cabinet Capacity (Ltrs)	NA	18	18	NA	18
Cooling Cabinet Temperature	NA	<16°C	NA	NA	<16°C
No. of Faucets	3	3	3	3	3
Cold Water Storage Capacity in Ltrs	3	3	3	3	3
Hot Water Storage Capacity in Ltrs	0.9	0.9	0.9	0.9	0.9
Display	LED Indicators	LED Indicators	LED Indicators	LED Indicators	LED Indicators
Tap Function	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold
Hot Water Dispensing Lock	Yes	Yes	Yes	Yes	Yes

PURE SERIES

Models	Minimagic Pure T	Minimagic Pure R	Minimagic Pure F	Minimagic Pure FS	Minimagic Pearl RB	Minimagic Pearl RR	Minimagic BL-C
Unit Dimension (WxDxH) in mm	310 x 345 x 490	310 x 345 x 940	310 x 345 x 940	310 x 345 x 940	310 x 345 x 940	310 x 345 x 940	310 x 345 x 1090
Refrigerant	R-134	R-134	R-134	R-134	R-134	R-134	R-134
Type	Table Top	Floor Mounted	Floor Mounted	Floor Mounted	Floor Mounted	Floor Mounted	Bottom Loaded
Cabinet	No	Cooling Cabinet	Storage Cabinet	No	Cooling Cabinet	Cooling Cabinet	No
Cabinet Capacity (Ltrs)	NA	20	20	NA	20	20	NA
Cooling Cabinet Temperature	NA	<16°C	NA	NA	<16°C	<16°C	NA
No. of Faucets	3	3	3	3	3	3	1
Cold Water Storage Capacity in Ltrs	3	3	3	3	3	3	3
Hot Water Storage Capacity in Ltrs	0.9	0.9	0.9	0.9	0.9	0.9	0.9
Display	LED Indicators	LED Indicators	LED Indicators	LED Indicators	LED Indicators	LED Indicators	LED Indicators
Tap Function	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold
Hot Water Dispensing Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes



REACH-IN & UNDERCOUNTER CHILLERS & FREEZERS

These products are designed and tested to deliver precise cooling in any Indian conditions like high ambient temperature, rough usage, transportation and high humidity. The Controllers used by us are from internationally acclaimed brands. The stainless steel used is of food grade quality. The inner lining is made with SS304 which makes it safe for long duration storage. These units can also be offered with the option of SS shelves.



Rugged yet
Aesthetic Design



Anti-corrosive
Pre-coated Body



Odourless
Operation



Eco-friendly
Refrigerant



Safety
Compliant



Tropicalized
Machines



Food Grade
Stainless Steel



Longer Cooling
Retention



Rugged And
Heavy-duty
Shelves



LED Light

TECHNICAL SPECIFICATIONS

REACH-IN CHILLERS & FREEZERS

Description	KCR701S32DD-A-GNV	KFR701S32DD-A-GNV	KCR1451S32QD-A-GNV	KFR1451S32QD-A-GNV
Type of cooling	Ventilated	Ventilated	Ventilated	Ventilated
Gross Capacity /L	600	600	1200	1200
Nos of Doors	2	2	4	4
Dimension (in mm) (W×D×H)	680 x 810 x 2010	680 x 810 x 2010	1340 x 810 x 2010	1340 x 810 x 2010
Cabinet Temp. (°C)	-2~+8	-18~-22	-2~+8	-18~-22
Steel Grade - Inside / Outside	SS304/201	SS304/201	SS304/201	SS304/201
No Of Shelves	3	3	6	6
Inside Light	LED	LED	LED	LED
Castor / Leg type	Yes	Yes	Yes	Yes
Door Auto Closer	Yes	Yes	Yes	Yes
Refrigerant	R290	R290	R290	R290
Power (Watt)	210	465	400	700
Gross Weight	125	132	213	221
Net Weight	110	117	167	177

UNDERCOUNTER CHILLERS & FREEZERS

Description	UCC301S32DD-A-GNV	UCF301S32DD-A-GNV	UCC451S32TD-A-GNV	UCF451S32TD-A-GNV
Type of cooling	Ventilated	Ventilated	Ventilated	Ventilated
Gross Capacity /L	282	282	417	417
Nos of Doors	2	2	3	3
Dimension W×D×H (mm)	1360 x 700 x 850	1360 x 700 x 850	1795 x 700 x 850	1795 x 700 x 850
Cabinet Temp. (°C)	-2~+8	-18~-22	-2~+8	-18~-22
Steel Grade - Inside / Outside	SS304/201	SS304/201	SS304/201	SS304/201
No Of Shelves	1 Per Door	1 Per Door	1 Per Door	1 Per Door
Castor / Leg type	Yes	Yes	Yes	Yes
Door Auto Closer	Yes	Yes	Yes	Yes
Refrigerant	R290	R290	R290	R290
Power (Watt)	290	450	310	480
Gross Weight (Kgs)	119	124	140	165
Net Weight (Kgs)	102	107	121	146




ICE CUBE MACHINES

Ice cube machines are vital in hospitality, healthcare, food processing, and Super Markets because they provide a reliable supply of clean, uniform ice for cooling & preservation. Their importance lies not only in convenience but also in operational efficiency & hygiene.

TECHNICAL SPECIFICATIONS

Model	ICM40SBJ-A	ICM30SBJ-A	ICM20SBJ-A	ICM75S-A	ICM100S-A	ICM130S-A	ICMB200-A
Ice - Type	Regular Dice	Regular Dice	Regular Dice	Regular Dice	Regular Dice	Regular Dice	Regular Dice
Ice Size	21 x 21 x 21	21 x 21 x 21	21 x 21 x 21	21 x 21 x 21	22 x 22 x 22	22 x 22 x 22	22 x 22 x 22
Ice Capacity	30KG/24H	25KG/24H	15KG/24H	72 KG/24H	95KG/24H	127KG/24H	190KG/24H
Storage	5kG	5kg	5kg	36kg	36 kg	36 Kg	125 Kg
Refrigerant	R290	R290	R290	R290	R290	R290	R290
Product							
Dimension (in mm) (WxDxH)	360 x 370 x 620	360 x 370 x 620	360 x 370 x 620	660 x 700 x 830	660 x 700 x 830	660 x 700 x 830	ICM 60 x 610 x 56
Bin Dimension (in mm) (WxDxH)	-	-	-	-	-	-	585 x 830 x 98



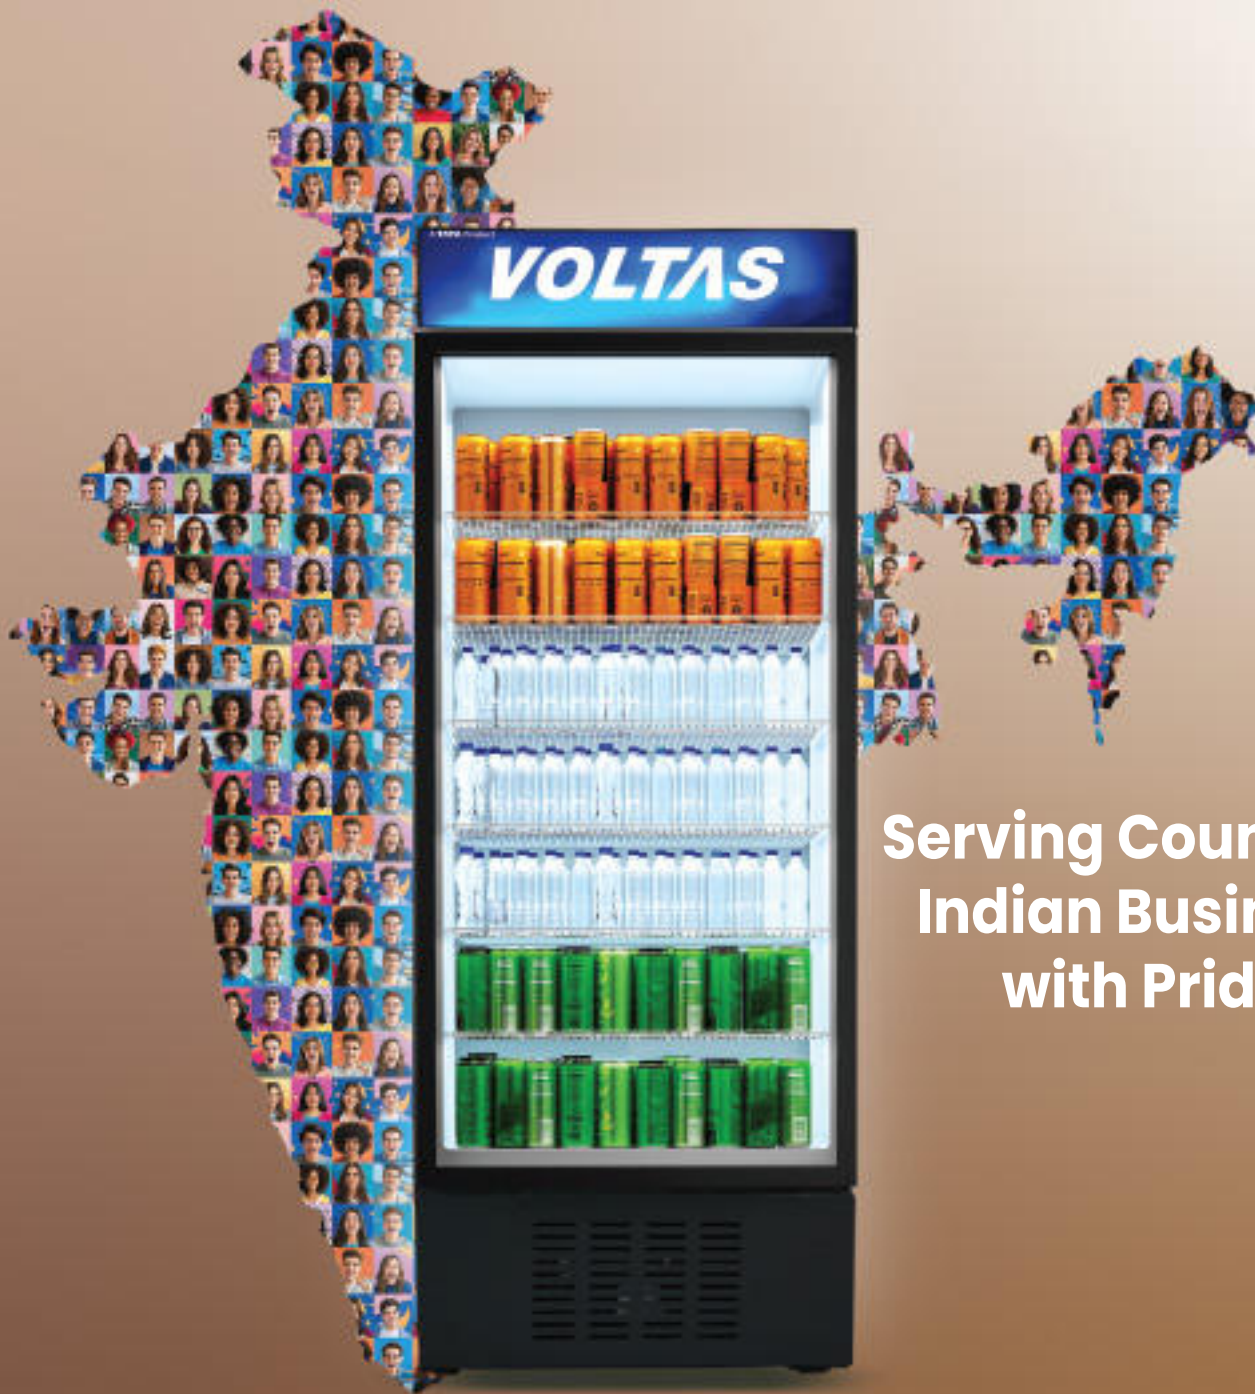

**Serving Countless
Indian Business
with Pride**

**CHEST FREEZERS | COMBO COOLERS | VISI COOLERS | WATER COOLERS |
| WATER DISPENSERS | KITCHEN REFRIGERATION | ICE CUBE MACHINES**

Voltas 24x7 Customer Service - 1860 599 4555, 9650694555.
For product registration SMS <WTA> to 9289525321
Buy only genuine Voltas stabilizers.

To locate your nearest store,
log on to: www.voltas.com/apps/store-locator

Follow us at [f My Voltas](#) [t My Voltas](#) [i My Voltas](#) [in Voltas Limited](#) [v My Voltas](#)

Buy online at:
www.voltas.com

Corporate Head Office: Voltas Limited, Voltas House A, Dr. Babasaheb Ambedkar Road, Chinchpokli, Mumbai - 400033, Phone: 022- 66656666. **Delhi:** Voltas Limited, A - 43, Mohan Co-Operative Industrial Estate, Mathura Road, New Delhi - 110044, Phone: 011-66505550. **Haryana:** Voltas Limited, A - 43, Mohan Co-Operative Industrial Estate, Mathura Road, New Delhi. Phone: 011-66505550. **Ghaziabad:** Voltas Limited, D-15, R.S. Plaza, 3rd Floor, Raj Nagar, Rdc, Ghaziabad - 201001, Ph. 0120-6404801. **Chandigarh:** Voltas Limited, Plot No. 194-195, First Floor, Industrial Area Phase-2, Chandigarh - 160002, Phone: 0172- 4111800. **Lucknow:** Voltas Limited, Shalimar Titanium, Block - C, 4th Floor, Office Nos. 410 - 412, Plot No. Tcg -1/1, Opp. Indira Gandhi Pratishthan, Vibhuti Khand, Gomti Nagar, Lucknow - 226 010, Phone: 0522-6566961. **Jaipur:** Voltas Limited, Diamond Tower, 201-203, Purani Chungi, Ajmer Road, Jaipur-302021, Phone: 0141-2972015. **Hyderabad:** Voltas Limited, 7-2-1735, Sanath Nagar, Opp. Neelema Hospital, Hyderabad-500018. Phone: 040-66746818. For Institutional Inquiry: 9603926217. **Vijayawada:** Voltas Limited, # 23-24-29, Beside Nadaras Function Hall, Bhagat Singh Road Corner, Vijayawada- 520011, For Institutional Inquiry - 9866511189. **Bangalore:** Voltas Limited, 7th Floor, Pride Hukul, Lalbagh Road, Bangalore- 560027, For Corporate Enquiries, Ph: 8239439016. **Chennai:** Voltas Limited, No 624 , Anna Salai , Teynampet , Chennai 600018 Ph. 044 -66760437. **Kochi:** Voltas Limited, Shema Building, Door No.39/4166, M G Road, Ravipuram, Kochi, Kerala -682016, Ph:0484 6805555. **Coimbatore:** Voltas Limited, 1413, Trichy Road, Coimbatore-641018. Phone-0422-6619051/31. **Mumbai:** Voltas Limited, Voltas House B, 2nd Floor, T.B. Kadam Marg, Chinchpokli, Mumbai - 400033, Phone: 022-66656333. **Goa:** Voltas Limited, Ground Floor, Flat No. 1, La Campala Colony No.2, Miramar Panaji Goa - 403001. **Pune:** Voltas Limited, UPBG Division, S/4 Chandon Nagar, Nagar Road, Pune - 411014, Phone: 020-66687408. **Thane:** Voltas Limited, Unit II, 1st Floor, 2nd Pokhran Road, Thane-400601, Phone: 022-67220106/07. **Nagpur:** Adisun Trade Center, 5th Floor, Plot No-38, Dhaga Layout, Near Crazy Castle, Nagpur- 440010, Phone: 9823036896. **Ahmedabad:** Voltas Limited, A-301, Shivalki Corporate Park, Shivranjini Crossroad Satellite, Ahmedabad- 380015, Phone: 0790-66301190/91. **Indore:** 501-B, 5th Floor, Nrk Business Park, Block B-1, Pu-4, Sch.No.54 Vijay Nagar Square, A.B.Road, Indore-452010, M.P., Phone: 0731-4043512 & 4046393. **Raipur:** Voltas Limited, Kunwar Ben Karsam Bhai Chamber, Shop No. 419/420, 4th Floor, New Timber Market, Mandi Market, Devendra Nagar, Raipur - 492001, Ph: 4033886. **Kolkata:** Voltas Limited, Unit No. 805, 8th Floor, Godrej Waterside Tower - 2, Plot No. - 5, Block Dp, Sector - V, Salt Lake, Kolkata - 700091, Phone: 033-66266200-205. For Institutional Inquiry - 9007014430. **Patna:** Voltas Limited, Maharaja Complex, 306-A, 3rd Floor, Frazer Road, Patna-800001, Phone : 7091091400 . For Institutional Inquiry -9007014430. **Jamshedpur:** Voltas Limited, Voltas House, 3rd Floor, Main Road, Bistupur, Jamshedpur - 831001, Phone: . 9040408545, 9830488691 For Institutional Inquiry -9007014430. **Bhubaneswar:** Voltas Limited, B-15, 2nd Floor, Arihant Plaza, Shaheed Nagar, Bhubaneswar-751007, Phone: 7077284059, 9937140010 For Institutional Inquiry 9007014430. **Guwahati:** Voltas Limited, Upasana Palace Building, 6th Floor, Dr. Rajendra Prasad Road, Near Ganesh Mandir, Ganeshguri, Guwahati - 781006. Phone : 9706982628 For Institutional Inquiry - 9007014430.

♻ In India, E-Waste (Management and Handling) Rules 2016 i/w E-Waste Management Amendment Rules 2018 has been notified by the Ministry of Environment, Forests and Climate Change Government of India. Voltas Limited (Voltas) stands committed to implement E-Waste Rules. Voltas has done tie-up with the government authorised E-Waste Recycler for facilitating our Channel partners/customers to dispose and/or discard Electrical and Electronic Products after its end-of-life (when a product/part is non-operational or non-repairable) and including spare parts. The authorised Recycler has expertise in assisting Voltas in fulfilling their compliances related to EPR and E-waste Management. Channel partners/customers need to get in touch with Voltas Call Centre (9650694555) to dispose and/or discard Electrical and Electronic Products after its end-of-life. Channel partners/Consumers should contribute to resource conservation and prevent potential environmental problems by a simple action — the proper depositing of their old consumer durable products, its accessories or defective spares with authorised Recyclers. E-waste should be disposed of separately from the general waste stream via designated collection facilities identified by Voltas.

*Features are available in select models only. T & C apply. As a continuous policy of product innovations at Voltas, design and specifications are subject to change without prior notice.